
M IR38 NPT

Codice articolo: **800001003** / **Macho**

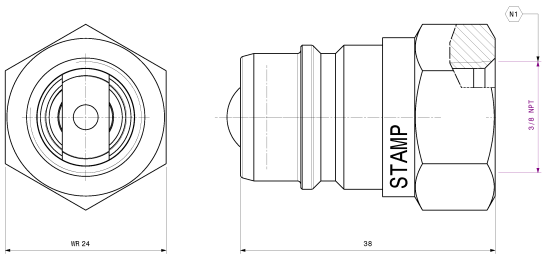

Estilo de válvula Bola	**Dimensión** 3/8"
Sellado Nitrile NBR	**Tratamiento** Cr3
Intercambio Enchufes similares (IR)	**Sistema de conexión** Tirar el manguito hacia atrás y empujar
Sistema de desconexión Tirar el manguito hacia atrás	**Material** Acero al carbono
Mecanismo de bloqueo Bola de bloqueo	**Desconexión con presión** No
Roscas FEMALE THREAD NPT (ANSI B.1.20.1)	**Conexión con presión residual** No
Temperatura -20 / +100 °C; -4 / +212 °F	**Aplicaciones** Maquinaria agrícola, Implementos agrícolas, Agricultura

Rendimiento	METRIC
Caudal máximo (l/min)	46
Presión de trabajo máxima - acoplado (MPa)	30
Presión de trabajo - desacoplado (MPa)	30
Presión de ruptura - acoplado (MPa)	100
Presión de ruptura - desacoplado (MPa)	100
Fuerza de conexión (N)	125
Fuerza de desconexión (N)	45
Pérdida (ml)	0.45

Tamaño	METRIC
Dimensión roscas (A)	3/8"
Longitud total M+F (mm)	76,3
Longitud (mm)	38
Diámetro máximo (mm)	19
Peso (kg)	0,08

Productos relacionados

Código de producto	Tipologia	Nombre del producto
800001002	Femmina	F IR38 NPT

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service