
# M IR12TIC NPT

Codice articolo: **800001011** / **Macho**





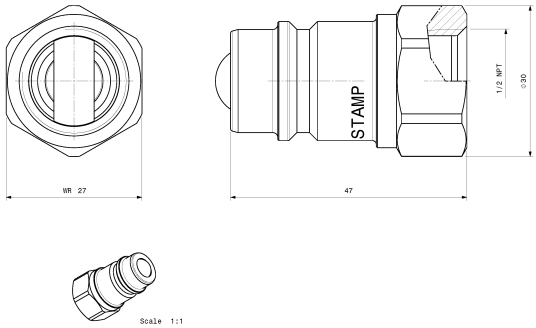

| | |
|---|---|
| **Estilo de válvula**<br>Bola | **Dimensión**<br>1/2" |
| **Sellado**<br>Nitrile NBR | **Tratamiento**<br>Cr3 |
| **Intercambio**<br>ISO 7241 A | **Sistema de conexión**<br>Tirar el manguito hacia atrás y empujar |
| **Sistema de desconexión**<br>Tirar el manguito hacia atrás | **Material**<br>Acero al carbono |
| **Mecanismo de bloqueo**<br>Bola de bloqueo | **Desconexión con presión**<br>No |
| **Roscas**<br>FEMALE THREAD NPT (ANSI B.1.20.1) | **Conexión con presión residual**<br>No |
| **Temperatura**<br>-20 / +100 °C; -4 / +212 °F | **Aplicaciones**<br>Maquinaria agrícola, Implementos agrícolas, Agricultura |

| Rendimiento | IMPERIAL |
|---|---|
| ISO DN (mm) | 12.5 |
| Caudal máximo (gpm) | 23.85 |
| Presión de trabajo máxima - acoplado (psi) | 3625 |
| Presión de trabajo - desacoplado (psi) | 2900 |
| Presión de ruptura - acoplado (psi) | 11600 |
| Presión de ruptura - acoplado (psi) | 7975 |
| Fuerza de conexión (lbf) | 18 |
| Fuerza de desconexión (lbf) | 11.25 |
| Pérdida (ml) | 2.3 |

| Tamaño | IMPERIAL |
|---|---|
| Dimensión roscas (A) | 1/2" |
| Longitud total M+F (in) | 3,4 |
| Longitud (in) | 1,85 |
| Diámetro máximo (in) | 0,81 |
| Peso (lb) | 0,23 |

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service