
F A4HP 1/8 NPT

Codice articolo: **801601014 / Hembra**

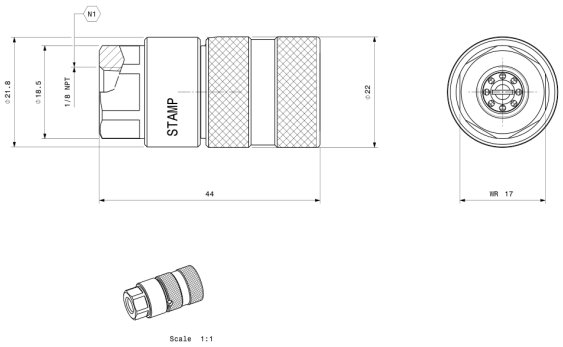

Estilo de válvula Cara plana	**Dimensión** 1/8"
Sellado Nitrile NBR	**Tratamiento** Cr3
Intercambio Perfil Stucchi A-HP	**Sistema de conexión** Push
Sistema de desconexión Tirar el manguito hacia atrás	**Material** Acero al carbono
Mecanismo de bloqueo Bola de bloqueo + Manguito de seguridad	**Desconexión con presión** No
Roscas FEMALE THREAD NPT (ANSI B.1.20.1)	**Conexión con presión residual** No
Temperatura -20 / +100 °C; -4 / +212 °F	**Aplicaciones** Equipos de rescate, Centrales hidráulicas, Utensili idraulici

Rendimiento	METRIC
Caudal máximo (l/min)	6
Presión de trabajo máxima - acoplado (MPa)	70
Presión de trabajo - desacoplado (MPa)	70
Presión de ruptura - acoplado (MPa)	160
Presión de ruptura - desacoplado (MPa)	160
Fuerza de conexión (N)	95
Fuerza de desconexión (N)	40
Pérdida (ml)	0.04

Tamaño	METRIC
Dimensión roscas (A)	1/8"
Longitud total M+F (mm)	72,3
Longitud (mm)	44
Diámetro máximo (mm)	22
Peso (kg)	0,09

Productos relacionados

Código de producto	Tipologia	Nombre del producto
801601015	Maschio	M A4HP 1/8 NPT

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service