
M IR12TIC NPT

Codice articolo: **800001011** / **Mâle**

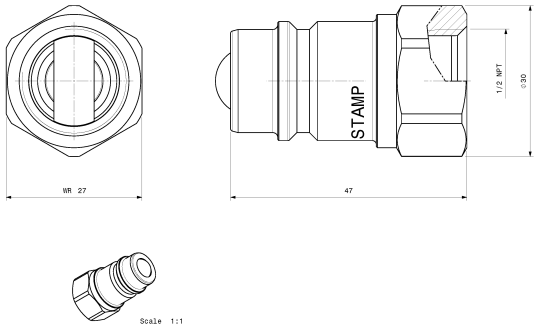

Type de clapet Bille	**Dimension cupleur** 1/2"
Joint Nitrile NBR	**Traitement** Cr3
Interchangeabilité ISO 7241 A	**Système de connexion** Retrait manuel de la bague et pousser
Système de déconnexion Retrait manuel de la bague	**Matière** Acier au carbone
Verrouillage Verrouillage à billes	**Déconnexion sous pression** No
Filetage FEMALE THREAD NPT (ANSI B.1.20.1)	**Connexion avec pression résiduelle** No
Température -20 / +100 °C; -4 / +212 °F	**Applications** Machines agricoles, Équipements agricoles, Agriculture

Performance	IMPERIAL
ISO DN (mm)	12.5
Débit maximale (gpm)	23.85
Pression de service maximale - couplé (psi)	3625
Pression de service - découplé (psi)	2900
Pression de rupture - couplé (psi)	11600
Pression de rupture - découplé (psi)	7975
Force de connexion (lbf)	18
Force de déconnexion (lbf)	11.25
Dépôt (ml)	2.3

Dimensions	IMPERIAL
Dimension du filetage (A)	1/2"
Longueur totale M+F (in)	3,4
Longueur (in)	1,85
Diamètre maximal (in)	0,81
Poids (lb)	0,23

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service