
F A5HP 3/8 NPT

Codice articolo: **801601008** / **Femelle**

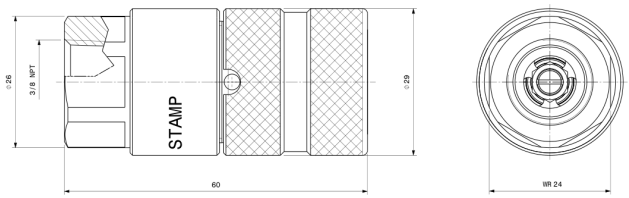

Type de clapet Face plane	**Dimension cupleur** 1/4"
Joint Nitrile NBR	**Traitement** Cr3
Interchangeabilité Profil Stucchi A-HP	**Système de connexion** Pousser
Système de déconnexion Retrait manuel de la bague	**Matière** Acier au carbone
Verrouillage Verrouillage à billes + Bague de sécurité	**Déconnexion sous pression** No
Filetage FEMALE THREAD NPT (ANSI B.1.20.1)	**Connexion avec pression résiduelle** No
Température -20 / +100 °C; -4 / +212 °F	**Applications** Équipements de secours, Centrales hydrauliques, Outils hydrauliques

Performance	METRIC
Débit maximale (l/min)	24
Pression de service maximale - couplé (MPa)	70
Pression de service - découplé (MPa)	50
Pression de rupture - couplé (MPa)	200
Pression de rupture - découplé (MPa)	150
Force de connexion (N)	125
Force de déconnexion (N)	45
Dépôt (ml)	0.02

Dimensions	METRIC
Dimension du filetage (A)	3/8"
Longueur totale M+F (mm)	103,9
Longueur (mm)	60
Diamètre maximal (mm)	29
Poids (kg)	0,21

Produits liés

Code produit	Tipologia	Nom du produit
801601009	Maschio	M A5HP 3/8 NPT

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service