
M I12GS 1/2 SAE*

Codice articolo: **809404003** / **Mâle** / ***Prodotto disponibile su richiesta**

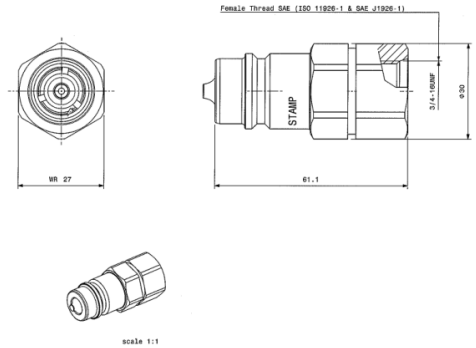

Type de clapet Clapet cônique	**Dimension cupleur** 1/2"
Joint Nitrile NBR	**Traitement** Cr3
Interchangeabilité ISO 7241 A	**Système de connexion** Pousser
Système de déconnexion Tirer	**Matière** Acier au carbone
Verrouillage Verrouillage à billes	**Déconnexion sous pression** No
Filetage FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connexion avec pression résiduelle** No
Température -20 / +100 °C; -4 / +212 °F	**Applications** Machines agricoles, Équipements agricoles, Agriculture

Performance	METRIC
ISO DN (mm)	12.5
Débit maximale (l/min)	90
Pression de service maximale - couplé (MPa)	25
Pression de service - découplé (MPa)	25
Pression de rupture - couplé (MPa)	90
Pression de rupture - découplé (MPa)	100
Force de connexion (N)	90
Force de déconnexion (N)	80
Dépôt (ml)	1.8

Dimensions	METRIC
Dimension du filetage (A)	3/4-16UNF
Longueur totale M+F (mm)	F+D-22
Longueur (mm)	61,1
Diamètre maximal (mm)	30
Poids (kg)	0,14

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service