
M I12GS 1/2 SAE*

Codice articolo: **809404003** / **Mâle** / ***Prodotto disponibile su richiesta**

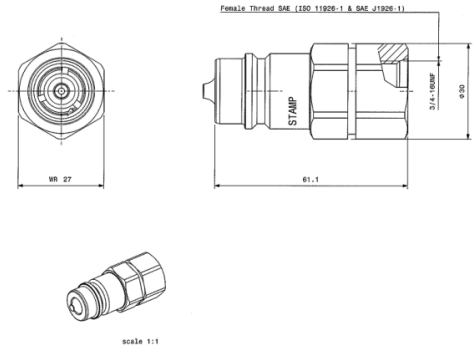

Type de clapet Clapet cônique	**Dimension cupleur** 1/2"
Joint Nitrile NBR	**Traitement** Cr3
Interchangeabilité ISO 7241 A	**Système de connexion** Pousser
Système de déconnexion Tirer	**Matière** Acier au carbone
Verrouillage Verrouillage à billes	**Déconnexion sous pression** No
Filetage FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connexion avec pression résiduelle** No
Température -20 / +100 °C; -4 / +212 °F	**Applications** Machines agricoles, Équipements agricoles, Agriculture

Performance	IMPERIAL
ISO DN (mm)	12.5
Débit maximale (gpm)	23.85
Pression de service maximale - couplé (psi)	3625
Pression de service - découplé (psi)	3625
Pression de rupture - couplé (psi)	13050
Pression de rupture - découplé (psi)	14500
Force de connexion (lbf)	20,25
Force de déconnexion (lbf)	18
Dépôt (ml)	1.8

Dimensions	IMPERIAL
Dimension du filetage (A)	3/4-16UNF
Longueur totale M+F (in)	F+D-0,87
Longueur (in)	2,41
Diamètre maximal (in)	1,18
Poids (lb)	0,32

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service