
M IR12TIC NPT

Codice articolo: **800001011** / **Maschio**

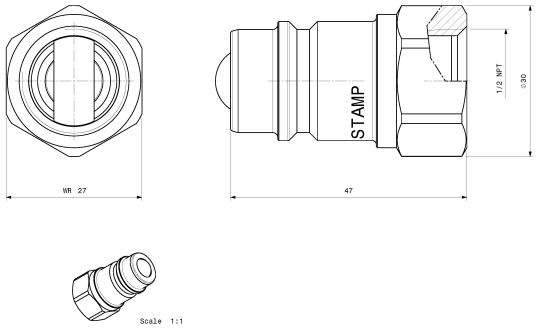

Sistema di tenuta Sfera	**Diametro nominale** 1/2"
Guarnizione Nitrile NBR	**Trattamento** Cr3
Intercambiabilità ISO 7241 A	**Sistema di connessione** Tirare indietro la ghiera e spingere
Sistema di disconnessione Tirare indietro la ghiera	**Materiale** Acciaio al carbonio
Meccanismo di bloccaggio Sfere di sicurezza	**Disconnessione in pressione** No
Filettatura FEMALE THREAD NPT (ANSI B.1.20.1)	**Connessione con pressione residua** No
Temperatura -20 / +100 °C; -4 / +212 °F	**Applicazioni** Macchine agricole, Attrezzature agricole, Agricoltura

Performance	IMPERIAL
ISO DN (mm)	12,5
Portata massima (gpm)	23,85
Pressione di esercizio massima - accoppiato (psi)	3625
Pressione di esercizio - disaccoppiato (psi)	2900
Pressione di scoppio - accoppiato (psi)	11600
Pressione di scoppio - disaccoppiato (psi)	7975
Forza di connessione (lbf)	18
Forza di disconnessione (lbf)	11,25
Versamento (ml)	2,3

Dimensioni	IMPERIAL
Misura del raccordo (A)	1/2"
Lunghezza complessiva M+F (in)	3,4
Lunghezza (in)	1,85
Diametro massimo (in)	0,81
Peso (lb)	0,23

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service