
M I12GS 1/2 SAE*

Codice articolo: **809404003** / **Maschio** / ***Prodotto disponibile su richiesta**

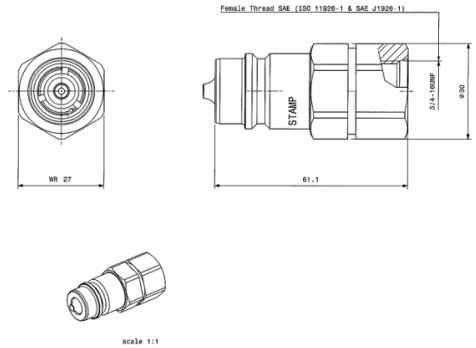

Sistema di tenuta Funghetto	**Diametro nominale** 1/2"
Guarnizione Nitrile NBR	**Trattamento** Cr3
Intercambiabilità ISO 7241 A	**Sistema di connessione** Spingere
Sistema di disconnessione Tirare	**Materiale** Acciaio al carbonio
Meccanismo di bloccaggio Sfere di sicurezza	**Disconnessione in pressione** No
Filettatura FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connessione con pressione residua** No
Temperatura -20 / +100 °C; -4 / +212 °F	**Applicazioni** Macchine agricole, Attrezzature agricole, Agricoltura

Performance	METRIC
ISO DN (mm)	12,5
Portata massima (l/min)	90
Pressione di esercizio massima - accoppiato (MPa)	25
Pressione di esercizio - disaccoppiato (MPa)	25
Pressione di scoppio - accoppiato (MPa)	90
Pressione di scoppio - disaccoppiato (MPa)	100
Forza di connessione (N)	90
Forza di disconnessione (N)	80
Versamento (ml)	1,8

Dimensioni	METRIC
Misura del raccordo (A)	3/4-16UNF
Lunghezza complessiva M+F (mm)	F+D-22
Lunghezza (mm)	61,1
Diametro massimo (mm)	30
Peso (kg)	0,14

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service