
# M IC15ND 3/4 BSP EXT*

Codice articolo: **813517295** / **Stecker**

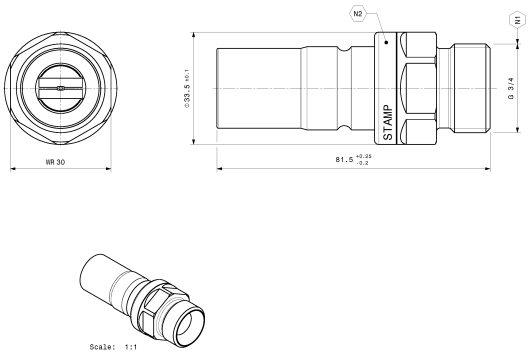


| | |
|---|---|
| **Dichtungssystem**<br>Flat Face | **Größe**<br>5/8" |
| **Dichtung**<br>EPDM | **Oberflächenschutz**<br>Ossidazione dura |
| **Austausch**<br>Profilo Stucchi IC | **Verbindungssystem**<br>Drücken |
| **Betätigungsart**<br>Druckhülse | **Werkstoff**<br>Alluminio |
| **Verriegelungsmechanismus**<br>Verschlusskugel | **Druckentlastende Trennung**<br>Nein |
| **Gewinde**<br>MALE THREAD BSPP (ISO 8434-6) | **Anschluss mit Restdruck**<br>Nein |
| **Temperatur**<br>-40 / +150 °C; -40 / +302 °F | **Anwendung**<br>Rechenzentrum, Bahn, Windkraft, Medizintechnik, Sonstige, Digitale Sender, Elektrofahrzeuge, HVAC/R, Laser, Verteidigung, Halbleiter |

| Performance | IMPERIAL |
|---|---|
| Maximaler Betriebsdruck - gekoppelt (psi) | 290 |
| Betriebsdruck - entkoppelt (psi) | 290 |
| Platzerdruck - gekoppelt (psi) | 1160 |
| Platzerdruck - entkoppelt (psi) | 1160 |
| Verbindungsfestigkeit (lbf) | 31,3 |
| Trennkraft (lbf) | 10,6 |
| Leckage (ml) | 0,01 |

| Größen | IMPERIAL |
|---|---|
| Anschlussgröße (A) | 3/4" |
| Gesamtlänge M+F (in) | 5,34 |
| Länge (in) | 3,21 |
| Maximaler Durchmesser (in) | 1,32 |
| Gewicht (lb) | 0,17 |

Verwandte Produkte

| Produkt-code | Tipologia | Produktname |
|---|---|---|
| 813500292 | Femmina | F IC15N 3/4 BSP |

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service