
M FL17 1 SAE*

Codice articolo: **802404117** / **Male** / ***Prodotto disponibile su richiesta**

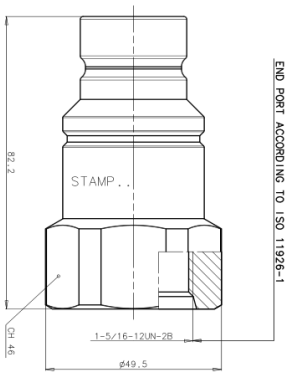

Valving style
Flat face

Body size
3/4"

Sealing
FKM (VITON)

Interchange
ISO 16028

Connection system
Push

Disconnection system
Pull back the sleeve

Material
Stainless steel (AISI 316L)

Locking mechanism
Locking ball + Safety lock

Disconnectable under pressure
No

Thread
FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)

Connectable under residual pressure
No

Temperature
-15 / +180 °C; +5 / +356 °F

Applications
Medical Devices, Semiconductors, Packaging, Food & Beverage, Laser, HVAC/R, Electric Vehicles, Digital Transmitters, Injection Moulding, Die Casting, Others, Marine, Chemical Pharma, Windmill, Test Bench, Steel Mill, Rail, Data Center, Coil Tubing Unit, Drilling Rig, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	19
Max. Flow suggested (gpm)	5.3
Max. Operating pressure - coupled (psi)	4785
Operating pressure - uncoupled (psi)	4060
Burst pressure - coupled (psi)	14500
Burst pressure - uncoupled (psi)	11600
Connect force (lbf)	45
Disconnect force (lbf)	13.5
Spillage (ml)	0.03

Dimensions	IMPERIAL
Port (A)	1-5/16-12UN
Overall length M+F (in)	6,03
Length (in)	3,24
Max. diameter (in)	1,95
Weight (lb)	0,95

Related products

Product code	Type	Product name
802404116	Femmina	F FL17 1 SAE

Spare kits

Product code	Product name
815700253	SPARE KIT OR VITON+BK M FF 34

Caps

Product code	Product name
815100013	PLASTIC CAP M FF34 RED
816005011	ALUMINUM CAP M FF34 NATURAL
815101013	PLASTIC CAP M FF34 YELLOW**
815102013	PLASTIC CAP M FF34 BLUE**
815103013	PLASTIC CAP M FF34 BLACK**
815104013	PLASTIC CAP M FF34 GREEN**
815105013	PLASTIC CAP M FF34 WHITE**
815107031	PLASTIC CAP M FF34 ORANGE**
815110031	PLASTIC CAP M FF34 MAGENTA**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service