
F VEP13P 1/2 JIS*

Codice articolo: **807207006** / **Female** / ***Prodotto disponibile su richiesta**

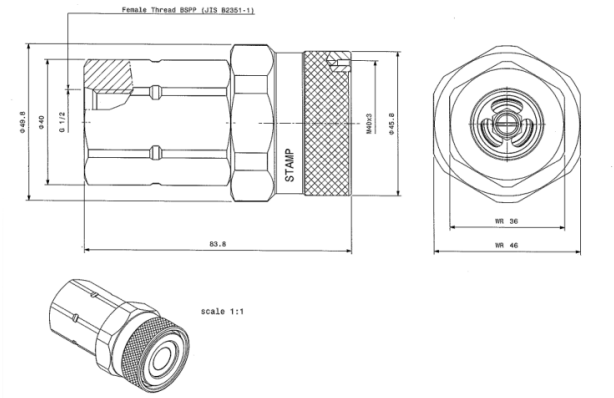

Valving style Flat face	**Body size** 1/2"
Sealing Nitrile NBR	**Treatment** Cr3 + QPQ
Interchange Stucchi profile VEP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** Yes
Thread FEMALE THREAD JIS - 30° CONE (B0202)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Steel Mill, Die Casting, Utensili idraulici, Earth moving, Vehicles, Oil & Gas

Performance	IMPERIAL
Max. Flow suggested (gpm)	23.85
Max. Operating pressure - coupled (psi)	7975
Operating pressure - uncoupled (psi)	4785
Burst pressure - coupled (psi)	20300
Burst pressure - uncoupled (psi)	14500
Spillage (ml)	0.02
Manual connect torque (lbf ft)	1.3266
Manual disconnect torque (lbf ft)	1.0318
Tightening torque (lbf ft)	47,91-55,23

Dimensions	IMPERIAL
Port (A)	1/2"
Overall length M+F (in)	6,6
Length (in)	3,3
Max. diameter (in)	1,96
Weight (lb)	1,36

Related products

Product code	Type	Product name
807207007	Maschio	M VEP13P 1/2 JIS

Caps

Product code	Product name
815303128	PLASTIC PLUG F VEP13 BLACK
815305074	ALUMINUM PLUG F VEP13 NATURAL
815300074	ALUMINUM PLUG F VEP13 RED **
815301074	ALUMINUM PLUG F VEP13 YELLOW **
815302074	ALUMINUM PLUG F VEP13 BLUE **
815303074	ALUMINUM PLUG F VEP13 BLACK **
815304074	ALUMINUM PLUG F VEP13 GREEN **

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service