
# F A15ZNSS L22 SCHOTT*

Codice articolo: **809710062** / **Female** / ***Prodotto disponibile su richiesta**

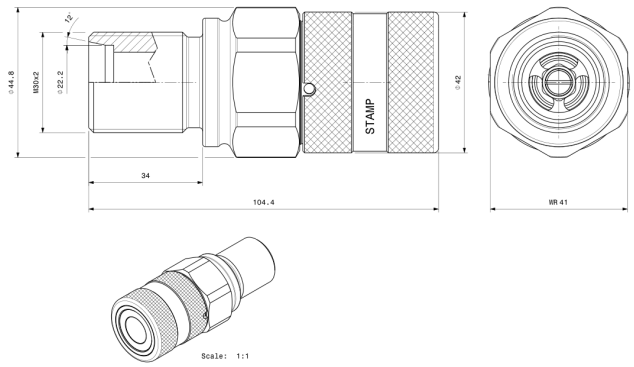


| | |
|---|---|
| **Valving style**<br>Flat face | **Body size**<br>5/8" |
| **Sealing**<br>Nitrile NBR | **Treatment**<br>Zn-Ni |
| **Interchange**<br>ISO 16028 | **Connection system**<br>Push |
| **Disconnection system**<br>Pull back the sleeve | **Material**<br>Carbon steel |
| **Locking mechanism**<br>Locking ball + Safety lock | **Disconnectable under pressure**<br>No |
| **Thread**<br>MALE THREAD METRIC L SCHOTT - 24° CONE BULKHEAD (ISO 8434-1 & DIN 2353) | **Connectable under residual pressure**<br>No |
| **Temperature**<br>-20 / +100 °C; -4 / +212 °F | **Applications**<br>Earth moving, Agriculture, Vehicles, Oil & Gas |

| Performance | METRIC |
|---|---|
| ISO DN (mm) | 16 |
| Max. Flow suggested (l/min) | 148 |
| Max. Operating pressure - coupled (Mpa) | 33 |
| Operating pressure - uncoupled (MPa) | 33 |
| Burst pressure - coupled (MPa) | 100 |
| Burst pressure - uncoupled (MPa) | 100 |
| Connect force (N) | 190 |
| Disconnect force (N) | 55 |
| Spillage (ml) | 0.02 |

| Dimensions | METRIC |
|---|---|
| Port (A) | M30x2 |
| Overall length M+F (mm) | 177,8 |
| Length (mm) | 104,4 |
| Max. diameter (mm) | 44,8 |
| Weight (kg) | 0,58 |

## Caps

| Product code | Product name |
|---|---|
| 815100008 | PLASTIC CAP F FF58 RED |
| 815200006 | PLASTIC FLIP CAP F FF58 RED |
| 816005008 | ALUMINUM CAP F FF58 NATURAL |
| 815101008 | PLASTIC CAP F FF58 YELLOW** |
| 815102008 | PLASTIC CAP F FF58 BLUE** |
| 815103008 | PLASTIC CAP F FF58 BLACK** |
| 815104008 | PLASTIC CAP F FF58 GREEN** |
| 815105008 | PLASTIC CAP F FF58 WHITE** |
| 815107008 | PLASTIC CAP F FF58 ORANGE** |
| 815110008 | PLASTIC CAP F FF58 MAGENTA** |
| 815201006 | PLASTIC FLIP CAP F FF58 YELLOW** |
| 815202006 | PLASTIC FLIP CAP F FF58 BLUE** |
| 815203006 | PLASTIC FLIP CAP F FF58 BLACK** |
| 815204006 | PLASTIC FLIP CAP F FF58 GREEN** |

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service