
M FIRG17V 1 BSP*

Codice articolo: **800800113** / **Male** / ***Prodotto disponibile su richiesta**

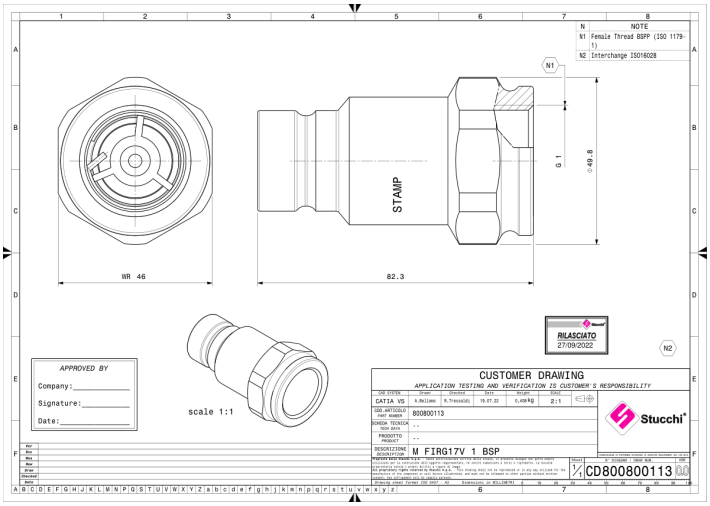

Valving style Flat face	**Body size** 3/4"
Sealing FKM (VITON)	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** No
Temperature -15 / +180 °C; +5 / +356 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Test Bench, Utensili idraulici, Construction, Agriculture, Trucks & Vehicles, Oil & Gas

Performance	METRIC
ISO DN (mm)	19
Max. Flow suggested (l/min)	200
Max. Operating pressure - coupled (MPa)	25
Operating pressure - uncoupled (MPa)	33
Burst pressure - coupled (MPa)	100
Burst pressure - uncoupled (MPa)	100
Connect force (N)	240
Disconnect force (N)	65
Spillage (ml)	0.03

Dimensions	METRIC
Port (A)	1"
Overall length M+F (mm)	153,5
Length (mm)	82,3
Max. diameter (mm)	30
Weight (kg)	0,39

Related products

Product code	Type	Product name
800800112	Femmina	F FIRG17V 1 BSP

Spare kits

Product code	Product name
815700253	SPARE KIT OR VITON+BK M FF 34

Caps

Product code	Product name
815100013	PLASTIC CAP M FF34 RED
816005011	ALUMINUM CAP M FF34 NATURAL
815101013	PLASTIC CAP M FF34 YELLOW**
815102013	PLASTIC CAP M FF34 BLUE**
815103013	PLASTIC CAP M FF34 BLACK**
815104013	PLASTIC CAP M FF34 GREEN**
815105013	PLASTIC CAP M FF34 WHITE**
815107031	PLASTIC CAP M FF34 ORANGE**
815110031	PLASTIC CAP M FF34 MAGENTA**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service