
F FIRG17 1 SAE

Codice articolo: **800804012** / **Female**

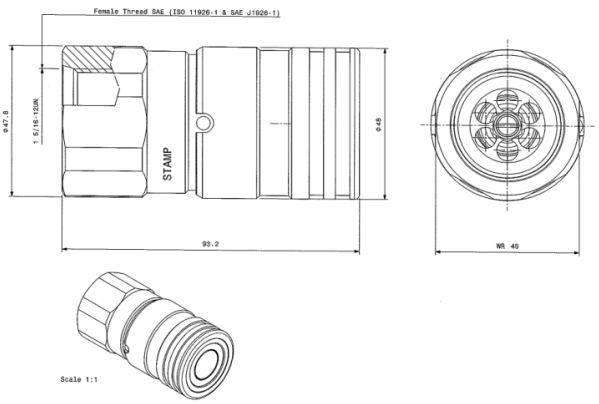

Valving style Flat face	**Body size** 3/4"
Sealing FKM (VITON)	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** No
Temperature -15 / +180 °C; +5 / +356 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Test Bench, Utensili idraulici, Construction, Agriculture, Trucks & Vehicles, Oil & Gas

Performance	METRIC
ISO DN (mm)	19
Max. Flow suggested (l/min)	170
Max. Operating pressure - coupled (MPa)	25
Operating pressure - uncoupled (MPa)	33
Burst pressure - coupled (MPa)	100
Burst pressure - uncoupled (MPa)	100
Connect force (N)	270
Disconnect force (N)	90
Spillage (ml)	0.03

Dimensions	METRIC
Port (A)	1-5/16-12UN
Overall length M+F (mm)	153,5
Length (mm)	93,2
Max. diameter (mm)	48
Weight (kg)	0,79

Related products

Product code	Type	Product name
800804013	Maschio	M FIRG17 1 SAE

Caps

Product code	Product name
815100010	PLASTIC CAP F FF34 RED
815200008	PLASTIC FLIP CAP F FF34 RED
816005010	ALUMINUM CAP F FF34 NATURAL
815101010	PLASTIC CAP F FF34 YELLOW*
815102010	PLASTIC CAP F FF34 BLUE*
815103010	PLASTIC CAP F FF34 BLACK*
815104010	PLASTIC CAP F FF34 GREEN*
815105010	PLASTIC CAP F FF34 WHITE*
815107006	PLASTIC CAP F FF34 ORANGE*
815110006	PLASTIC CAP F FF34 MAGENTA*
815201008	PLASTIC FLIP CAP F FF34 YELLOW*
815202008	PLASTIC FLIP CAP F FF34 BLUE*
815203008	PLASTIC FLIP CAP F FF34 BLACK*
815204008	PLASTIC FLIP CAP F FF34 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service