
M FIRG17 3/4 SAE

Codice articolo: **800804021** / **Male**

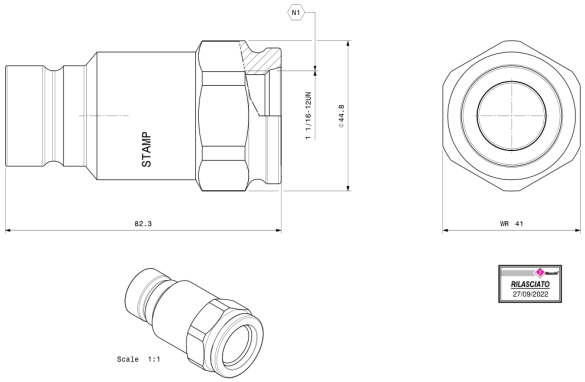

Valving style Flat face	**Body size** 3/4"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** No
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Test Bench, Utensili idraulici, Construction, Agriculture, Trucks & Vehicles, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	19
Max. Flow suggested (gpm)	45.05
Max. Operating pressure - coupled (psi)	4785
Operating pressure - uncoupled (psi)	4785
Burst pressure - coupled (psi)	14500
Burst pressure - uncoupled (psi)	14500
Connect force (lbf)	60.75
Disconnect force (lbf)	20,25
Spillage (ml)	0.03

Dimensions	IMPERIAL
Port (A)	1-1/16-12UN
Overall length M+F (in)	5,87
Length (in)	3,24
Max. diameter (in)	1,18
Weight (lb)	0,97

Related products

Product code	Type	Product name
800804020	Femmina	F FIRG17 3/4 SAE

Spare kits

Product code	Product name
815700343	SPARE KIT OR NBR+BK M FF 34

Caps

Product code	Product name
815100013	PLASTIC CAP M FF34 RED
816005011	ALUMINUM CAP M FF34 NATURAL
815101013	PLASTIC CAP M FF34 YELLOW*
815102013	PLASTIC CAP M FF34 BLUE*
815103013	PLASTIC CAP M FF34 BLACK*
815104013	PLASTIC CAP M FF34 GREEN*
815105013	PLASTIC CAP M FF34 WHITE*
815107031	PLASTIC CAP M FF34 ORANGE*
815110031	PLASTIC CAP M FF34 MAGENTA*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service