
M VEP15P 3/4 SAE

Codice articolo: **807204011** / **Male**

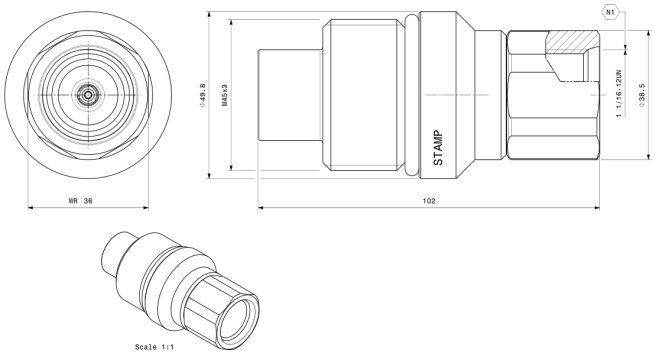

Valving style Flat face	**Body size** 5/8"
Sealing Nitrile NBR	**Treatment** Cr3 + QPQ
Interchange Stucchi profile VEP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** Yes
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Steel Mill, Die Casting, Utensili idraulici, Construction, Trucks & Vehicles, Oil & Gas

Performance	IMPERIAL
Max. Flow suggested (gpm)	39.22
Max. Operating pressure - coupled (psi)	7975
Operating pressure - uncoupled (psi)	7975
Burst pressure - coupled (psi)	20300
Burst pressure - uncoupled (psi)	20300
Spillage (ml)	0.03
Manual connect torque (lbf ft)	2.211
Manual disconnect torque (lbf ft)	1.3266
Tightening torque (lbf ft)	51,59-58,96

Dimensions	IMPERIAL
Port (A)	1-1/16-12UN
Overall length M+F (in)	6,63
Length (in)	4,02
Max. diameter (in)	1,96
Weight (lb)	1,49

Related products

Product code	Type	Product name
807204010	Femmina	F VEP15P 3/4 SAE

Spare kits

Product code	Product name
815700738	SPARE KIT OR NBR+BK M VEP15

Caps

Product code	Product name
815303131	PLASTIC CAP M VEP15 BLACK
815305077	ALUMINUM CAP M VEP15 NATURAL
815300077	ALUMINUM CAP M VEP15 RED*
815301077	ALUMINUM CAP M VEP15 YELLOW*
815302077	ALUMINUM CAP M VEP15 BLUE*
815303077	ALUMINUM CAP M VEP15 BLACK*
815304077	ALUMINUM CAP M VEP15 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service