
M VEP45P 2? FH CODE62*

Codice articolo: **807224019** / **Male** / ***Prodotto disponibile su richiesta**

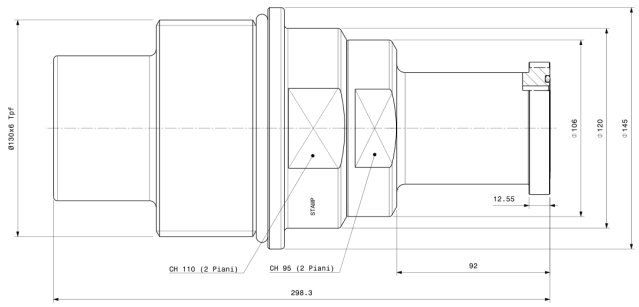

Valving style Flat face	**Body size** 2"
Sealing Nitrile NBR	**Treatment** Cr3 + QPQ
Interchange Stucchi profile VEP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** Yes
Thread FLANGE HEAD - WITH O-RING (ISO 6162-2 6000 psi & SAE J518)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Steel Mill, Die Casting, Utensili idraulici, Construction, Trucks & Vehicles, Oil & Gas

Performance	IMPERIAL
Max. Flow suggested (gpm)	265
Max. Operating pressure - coupled (psi)	5075
Operating pressure - uncoupled (psi)	5075
Burst pressure - coupled (psi)	15950
Burst pressure - uncoupled (psi)	15950
Spillage (ml)	0.35
Manual connect torque (lbf ft)	29.48
Manual disconnect torque (lbf ft)	29.48
Tightening torque (lbf ft)	235,84-257,95

Dimensions	IMPERIAL
Port (A)	2"
Overall length M+F (in)	21,87
Length (in)	11,74
Max. diameter (in)	4,72
Weight (lb)	0,65 28,29

Related products

Product code	Type	Product name
807224018	Femmina	F VEP45P 2? FH CODE62

Spare kits

Product code	Product name
815700728	SPARE KIT OR NBR+BK M VEP45

Caps

Product code	Product name
815305043	ALUMINUM CAP M VEP45 NATURAL
815300043	ALUMINUM CAP M VEP45 RED **
815301043	ALUMINUM CAP M VEP45 YELLOW **
815302043	ALUMINUM CAP M VEP45 BLUE **
815303043	ALUMINUM CAP M VEP45 BLACK **
815304043	ALUMINUM CAP M VEP45 GREEN **

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service