
F VP15PZN 3/4 SAE

Codice articolo: **811004010** / **Female**

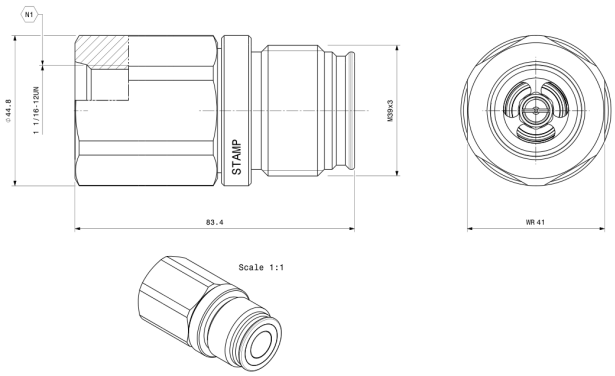

Valving style Flat face	**Body size** 5/8"
Sealing Nitrile NBR	**Treatment** Zn-Ni
Interchange Stucchi profile VP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect + Safety sleeve	**Disconnectable under pressure** Yes
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles, Oil & Gas

Performance	IMPERIAL
Max. Flow suggested (gpm)	39.22
Max. Operating pressure - coupled (psi)	7975
Operating pressure - uncoupled (psi)	4785
Burst pressure - coupled (psi)	20300
Burst pressure - uncoupled (psi)	14500
Spillage (ml)	0.03
Manual connect torque (lbf ft)	0.8107
Manual disconnect torque (lbf ft)	0.737
Max. residual pressure during connection (in the male, female to drain) (psi)	3625
Max. residual pressure during connection (in the female, male to drain) (psi)	3625
Max. residual pressure during connection (in male and female) (psi)	2900
Max. residual pressure during disconnection (psi)	2900

Dimensions	IMPERIAL
Port (A)	1-1/16-12UN
Overall length M+F (in)	6,89
Length (in)	3,28
Max. diameter (in)	1,76
Weight (lb)	1,37

Related products

Product code	Type	Product name
811004011	Maschio	M VP15PZN 3/4 SAE

Caps

Product code	Product name
815305056	ALUMINUM CAP F VP15 NATURAL
815300056	ALUMINUM CAP F VP15 RED*
815301056	ALUMINUM CAP F VP15 YELLOW*
815302056	ALUMINUM CAP F VP15 BLUE*
815303056	ALUMINUM CAP F VP15 BLACK*
815304056	ALUMINUM CAP F VP15 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service